


# FP-4200

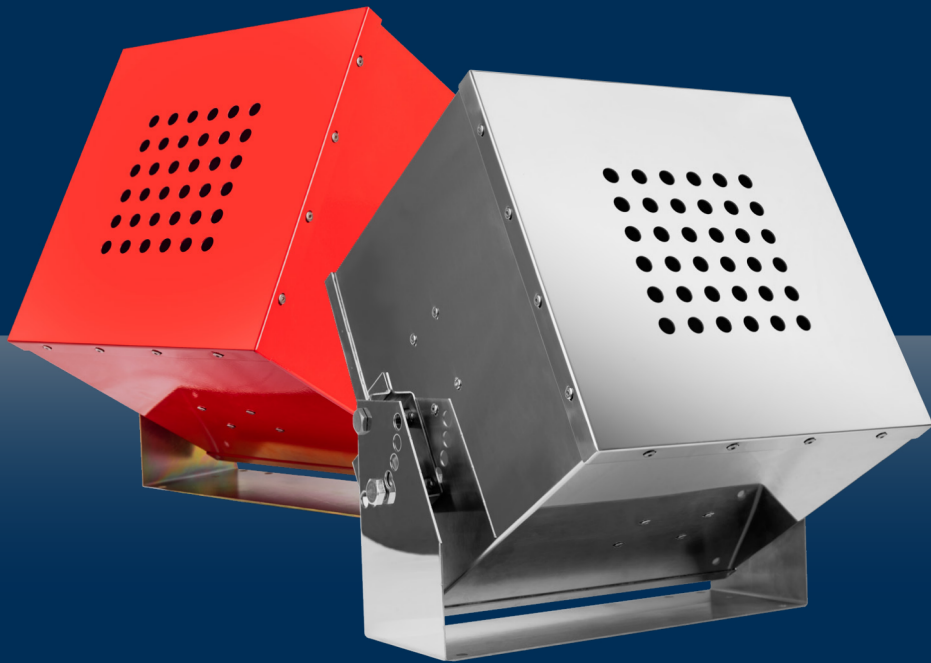

## ■ FP-4200T

**Product Code:** 10338

**Product Description:** FirePro Fire Extinguishing Generator FP-4200T

**Features:**

- LPCB, UL, KIWA & BSI Certified
- This model can be activated by a Bulb Thermal Activator
- Carbon-Steel casing Red-coated

## ■ FP-4200TS

**Product Code:** 10644

**Product Description:** FirePro Fire Extinguishing Generator FP-4200TS

**Features:**

- LPCB, UL, KIWA & BSI Certified
- This model can be activated by a Bulb Thermal Activator
- Stainless steel casing

## TECHNICAL INFORMATION

<b>Model</b>	FP-4200T / FP-4200TS
<b>Activation method</b>	Thermal Electrical (Minimum pulse voltage: 1.5 VDC, Minimum pulse current: 0.8 A, Minimum pulse duration: 0.5 s)
<b>Activator type</b>	Heating element with 2.2 ohm resistance
<b>Current intensity to be tested</b>	Maximum 5 mA
<b>Weight (gross)</b>	25000 g (excluding bracket)
<b>Mass of FPC compound</b>	4200 g
<b>Operational discharge time</b>	15 - 20 seconds
<b>Dimensions</b>	300 mm x 300 mm x 300 mm
<b>Fire class</b>	EN 2: A,B,C,F / NFPA 10: A,B,C

Generators are provided complete with brackets